

Series R19A Subminiature Rocker Switch (SPST, SPDT) (RA)

Rocker switch for Appliance: communication appliance, test equipment, automation machine, office appliance, and consumer appliance.

R19A (RA) Series switch can easily snap into the 13mm x 19mm mounting panel cut-out, with the terminals of fasten(quick connect) type, solder type, PCB straight type and PCB angle type. Users may choose the SPST or SPDT functions according to their special needs. The actuator type could be rocker or paddle. We may make switch housing and actuator color of black, white, red, green, blue or other colors as per customers' request. Switch with LED red, green and yellow available.

Part number: RA32KKBP0F (standard switch)

Description:

Function: SPDT, ON-OFF-ON

Rating: 6A250VAC

Approvals: UL, CSA, VDE, FIMKO, SEMKO, DEMKO, NEMKO

Housing color: Black

Rocker color: Black


Actuator Marking: I O II marking, two position marking

Terminal type: PCB straight terminal type

Packing: @2000 pcs/carton


@net weight: 9 kgs/carton


@gross weight: 10 kgs/carton

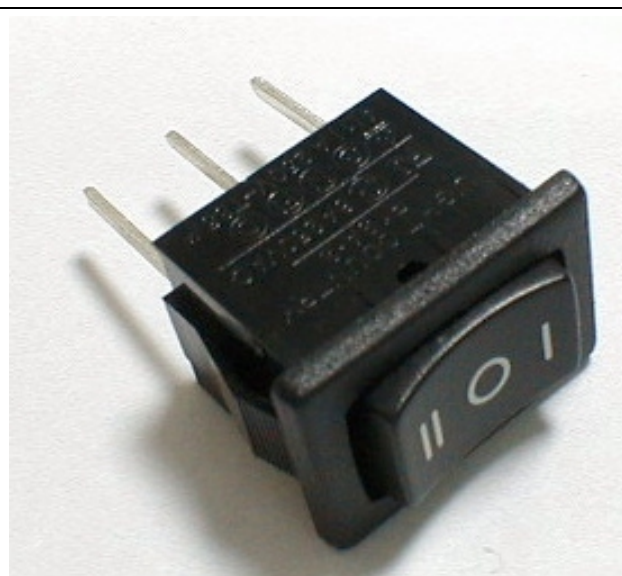



Panel cut out

Z	Y	X
0.70~1.25	12.80~12.90	19.20~19.30
1.25~2.00	12.80~12.90	19.30~19.40
2.00~3.00	12.80~12.90	19.50~19.60

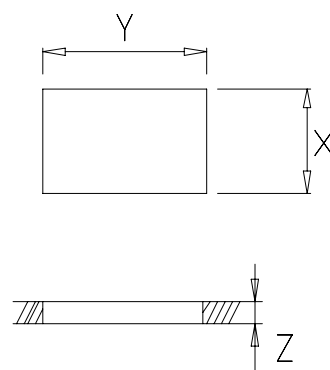

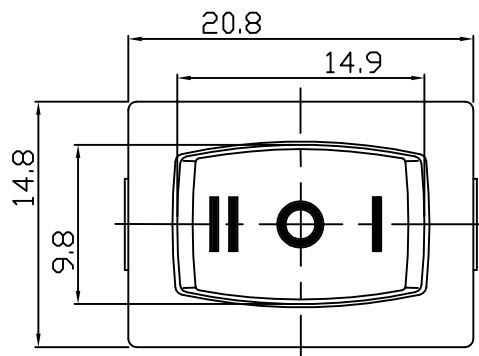

※ UL File:
No.104190 < >
※ CSA File:
No.081268X0000
※ VDE File:
No.131655

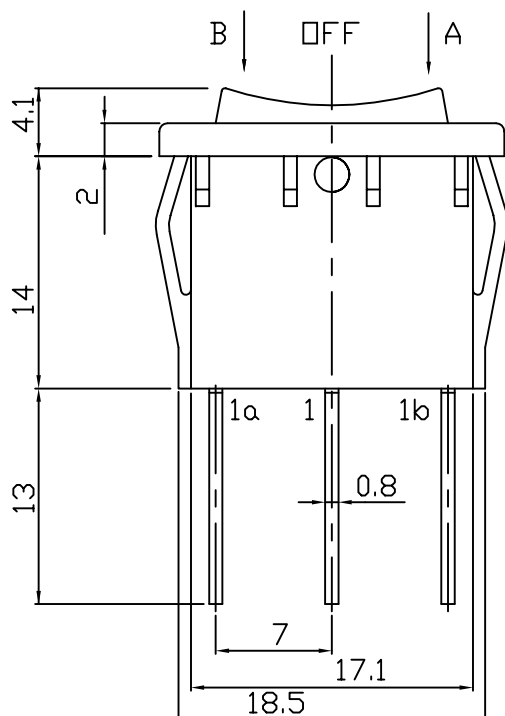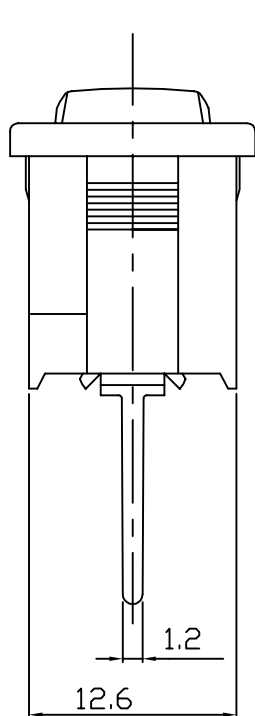

POLES FUNCTION	OPTION OF FUNCTION			—
	A	—	B	
SPDT	1-1a	OFF	1-1b	—

COLOR LIST


ROCKER	HOUSING
BLACK	BLACK
WHITE	WHITE
GRAY	GRAY
RED	
ORANGE	
YELLOW	
GREEN	

RATING						REMARK
125VAC	250VAC	30VDC				
	6A					

CONTACT RESISTANCE		DC 2~4V 0.1A <20 mili ohm
INSULATION RESISTANCE		>500M ohm (DC 500V)
DIELECTRIC STRENGTH		1500V AC 1 min
LIFE	ELECTRICAL	OVER 10000 CYCLES
	MECHANICAL	OVER 30000 CYCLES

PANEL MOUNTING

PANEL THICKNESS	X	Y
0.7 ~ 4	13	19.2~19.8



SERIES	R19A SUBMINIATURE ROCKER SWITCH (RA)		
PART NUMBER:	RA32KKBP0F	(SPDT, ON-OFF, ON)	

LIGHT COUNTRY CO., LTD